User Manual

H.264 Mega Pixel

IP Vandal Dome Camera

WARINGS

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MISTURE.
DO NOT INSERT ANY METALLIC OBJECT THROUGH VENTILATION GRILLS.

CAUTION

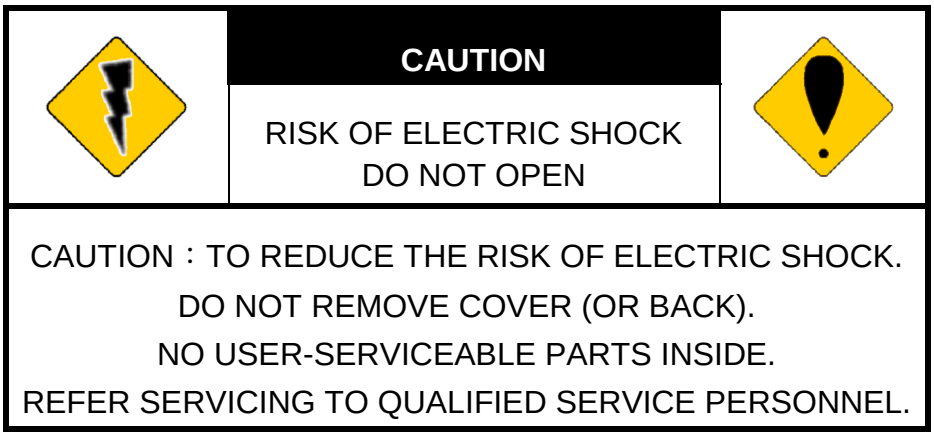
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
CAUTION：TO REDUCE THE RISK OF ELECTRIC SHOCK.
DO NOT REMOVE COVER (OR BACK).
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

COPYRIGHT

THE TRADEMARKS MENTIONED IN THE MANUAL ARE LEGALLY REGISTERED TO THEIR RESPECTIVE COMPANIES.

Content

I. PREFACE 4

II. PRODUCT SPECIFICATIONS 4

III. PRODUCT INSTALLATION 6

A. MONITOR SETTING 6

B. HARDWARE INSTALLATION AND I/O PIN ASSIGNMENT 7

C. IP ASSIGNMENT 11

D. INSTALL ACTIVEX CONTROL: 13

IV. LIVE VIDEO 15

V. CONFIGURATION 17

A. SYSTEM 18

B. NETWORK 22

C. A/V SETTING 26

D. EVENT LIST 32

VI. NETWORK CONFIGURATION 38

VII. FACTORY DEFAULT 40

VIII. PACKAGE CONTENTS 40

APPENDIX I 40

V1.0_090909

I. Preface

IP Vandal Dome is a professional CMOS Mega Pixel IP Vandal Dome. It has built-in web server which enables user to view real-time video via IE browser. It also supports simultaneously H.264/JPEG/ MPEG4 (3GPP Only) video compression with CMOS M-Pixel Sensor which provides smooth and high video quality. The video can be stored in the SD card, and can be playback remotely. IP Vandal Dome is an easy-to-use IP Camera which is designed for security application.

II. Product Specifications

- IP66
- 2M CMOS Sensor
- Power over Ethernet available
- IR LED Built-in 12M
- Vandal-proof 400 Pounds
- H.264/ JPEG/ MPEG4 (3GPP only) compression
- SD card backup
- 2-way audio
- Support Cell Phone/PDA/3GPP
- 3 Streaming
- SDK for Software Integration
- Free Bundle 36 ch recording software

Specifications

Hardware	
CPU	ARM 9,32 bit RISC
DDR2	128MB
Flash	8M
Image sensor	1/3” CMOS (2M-Pixel)
Lens Type	Vari-focal 2.7~9mm Mega Pixel Lens
ICR	Mechanism IR Cut Filter(optional)
LED	Built-in 18 IR LED (optional)

	IR Distance-12M (Optional)
I/O	1in/1 relay out
Video Out	1 Vp-p, 75 Ohms
Audio in	1 (RCA Type)
Audio Out	1 (RCA Type)
Power Over Ethernet	Yes
Power Consumption	DC 12V, 560mA
Dimensions	126mm (W) x 126mm (L) x 100mm (D)
Network	
Ethernet	10/ 100 Base-T
Network Protocol	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP
System	
Video Resolution	1600x1200,1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 160x120
CMOS setting	Night Mode, Brightness, Contrast, BLC, Sharpness
Triple Streaming	Yes
Image snapshot	Yes
Full screen monitoring	Yes
Privacy Mask	Yes, 3 different areas
Compression format	H.264/ JPEG/ MPEG4 (3GPP only)
Video bitrate adjust	CBR, VBR
Motion Detection	Yes, 3 different areas
Triggered action	Mail, FTP, Save to SD card, Relay
Pre/ Post alarm	Yes, configurable
Security	Password protection
Firmware upgrade	HTTP mode, can be upgraded remotely
Simultaneous connection	Up to 10
Audio	Yes, 2-way(Duplex Support)
SD card management	
Recording trigger	Motion Detection, IP check, Network Status (wire Connection only), schedule, alarm
Video format	AVI, JPEG
Video playback	Yes

Delete files		Yes
Web browsing requirement		
OS		Windows 2000, XP, 2003, Microsoft IE 6.0 or above
Hardware	Suggested	Intel Dual Core 1.66G,RAM: 1024MB, Graphic card: 128MB
	Minimum	Intel-C 2.8G, RAM: 512MB, Graphic card: 64MB

III. Product Installation

A. Monitor Setting

i. Right-Click on the desktop. Select " Properties"

ii. Change color quality to highest (32bit).

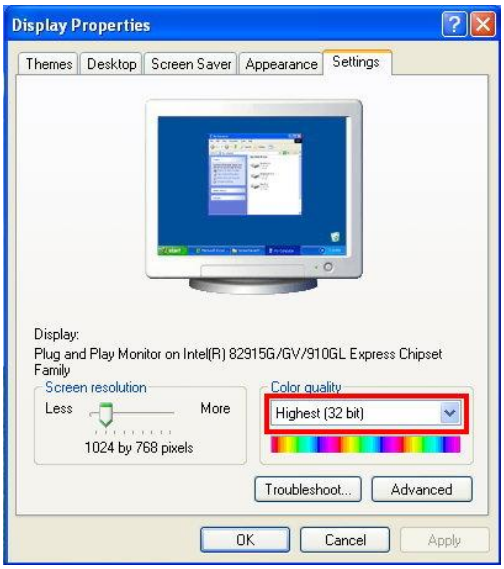

B. Hardware Installation and I/O Pin Assignment

i. Connect a power adapter and IP Camera to PC or local network

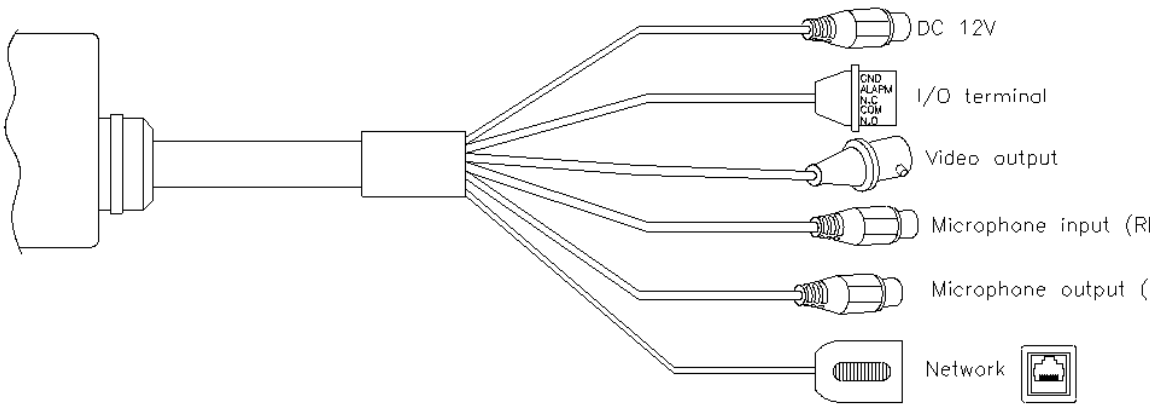

ii. I/O Control Instruction

I/O terminal connector – used in application, for e.g., motion detection, event triggering, alarm notifications. It provides the interface to:

1 Digital Input (GND+Alarm) – An alarm input for connecting devices that can toggle between an open and closed circuit, for example: PIRs, door/window contacts, glass break detectors, etc. When a signal is received the state changes and the input becomes active.

Relay output (COM +N.O.) / (COM+N.C.) – An output to Relay switch, for example: LEDs, Sirens, etc

iii. Digital Input

Alarm Input

1. GND (Ground) : Initial state is LOW
2. Alarm : Max. 50mA, DC 3.3V

Relay Output

1. N.C. (Normally Close): Max. 1A, 24VDC or 0.5A, 125VAC
2. COM: (Common)
3. N.O. (Normally Open): Max. 1A, 24VDC or 0.5A, 125VAC

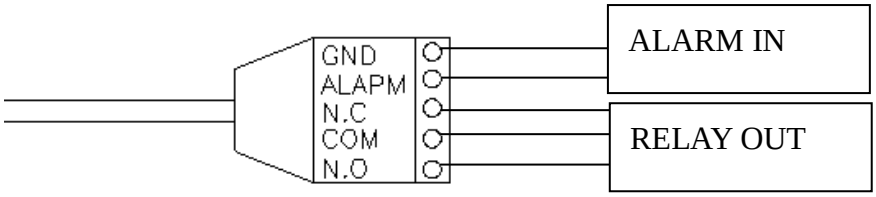

iv. Relay

1. Digital Input connection

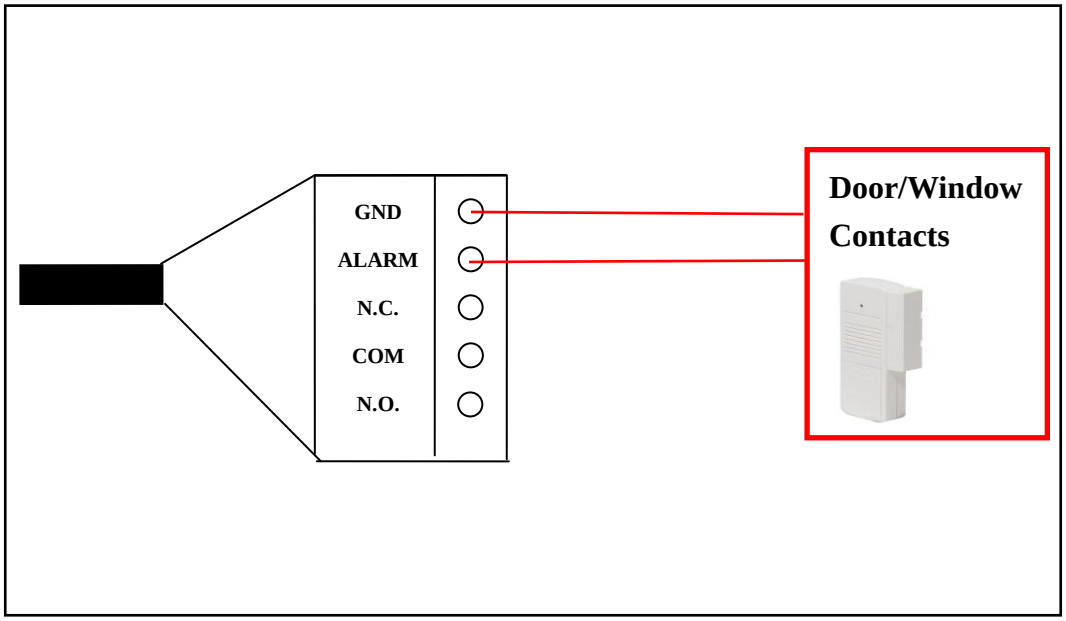

2. Relay Output Connection

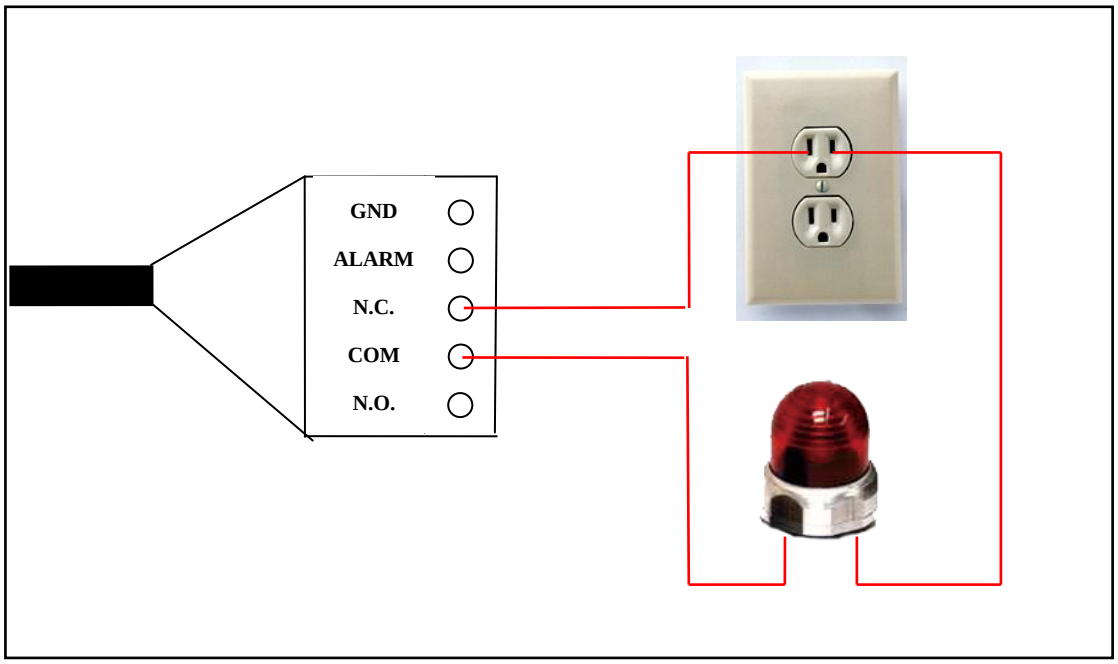

Or

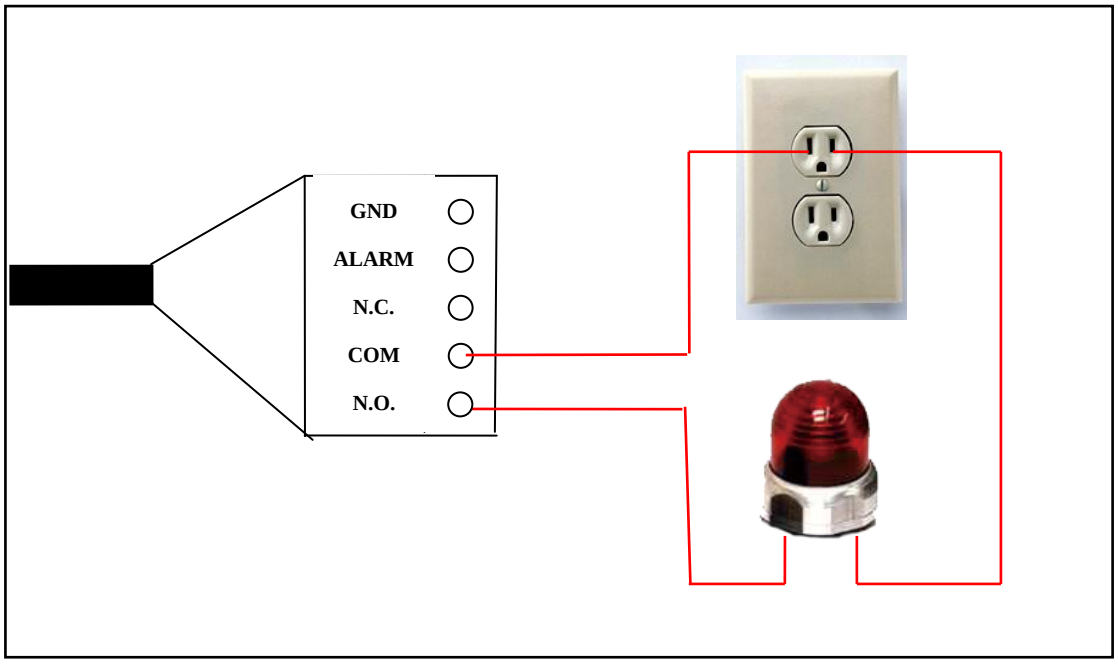

v. PoE (Power Over Ethernet)(Optional) **802.3af, 15.4W PoE Switch is recommended**

Power over Ethernet (PoE) is a technology that integrates power into a standard LAN infrastructure. It enables power to be provided to the network device, such as an IP phone or a network camera, using the same cable as that used for network connection. It eliminates the need for power outlets at the camera locations and enables easier application of uninterruptible power supplies (UPS) to ensure 24 hours a day, 7 days a week operation.

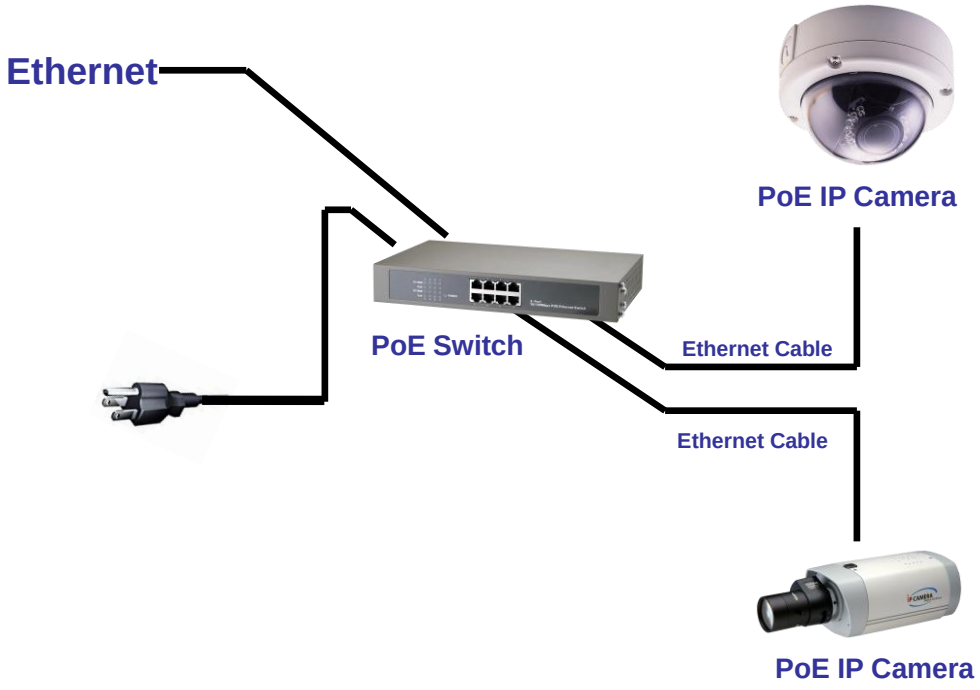

C. IP Assignment

i. Use the software, “IP Installer” to assign the IP address of IP CAMERA. The software is in the attached software CD.

ii. IP installer supports two languages
   a. IPInstallerCht.exe：Chinese version
   b. IPInstallerEng.exe：English version

iii. There are 3 kinds of IP configuration.
   a. Fixed IP (Public IP or Virtual IP)
   b. DHCP (Dynamic IP)
   c. Dial-up (PPPoE)

iv. Execute IP Installer

v. For Windows XP SP2 user, it may popup the following message box. Please click “Unblock”.

Windows Security Alert
To help protect your computer, Windows Firewall has blocked some features of this program.
Do you want to keep blocking this program?
Name: IPInstaller V2.1 Network Device Scan
Publisher: Unknown
Keep Blocking
Unblock
Ask Me Later
Windows Firewall has blocked this program from accepting connections from the Internet or a network. If you recognize the program or trust the publisher, you can unblock it. When should I unblock a program?

vi. IP Installer configuration:

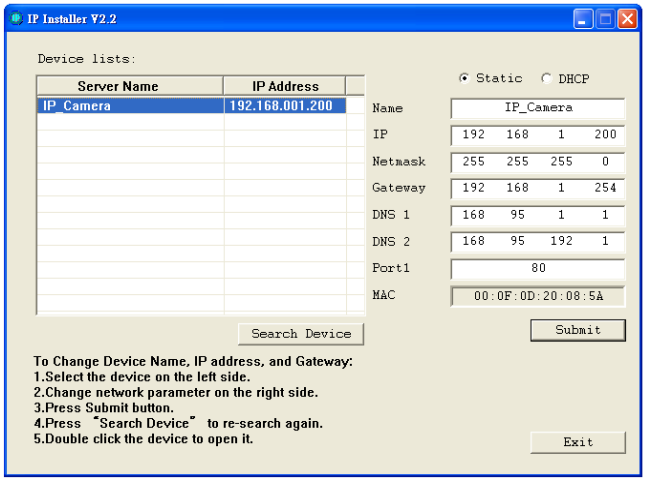

vii. IP Installer will search all IP Cameras connected on Lan. The user can click “Search Device” to search again.

viii. Click one of the IP Camera listed on the left side. The network

configuration of this IP camera will show on the right side. You may change the “name” of the IP Camera to your preference (eg: Office, warehouse). Change the parameter and click “Submit” then click “OK”. It will apply the change and reboot the Device.

ix. Please make sure the subnet of PC IP address and IP CAM IP address are the same.

The same Subnet:

IP CAM IP address: 192.168.1.200

PC IP address: 192.168.1.100

Different Subnets:

IP CAM IP address: 192.168.2.200

PC IP address: 192.168.1.100

To Change PC IP address:

Control Panel→Network Connections→Local Area Connection Properties→Internet Protocol (TCP/IP) →Properties

Please make sure your IP Camera and PC have the same Subnet. If not, please change IP Camera subnet or PC IP subnet accordingly.

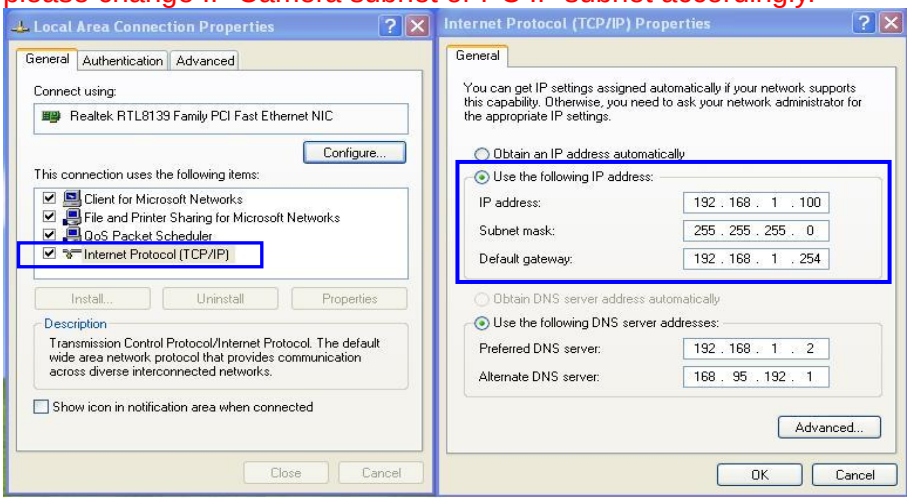
Local Area Connection Properties
General
Authentication
Advanced
Connect using:
Realtek RTL8139 Family PCI Fast Ethernet NIC
Configure...
This connection uses the following items:
Client for Microsoft Networks
File and Printer Sharing for Microsoft Networks
QoS Packet Scheduler
Internet Protocol (TCP/IP)
Install...
Uninstall
Properties
Description
Transmission Control Protocol/Internet Protocol. The default wide area network protocol that provides communication across diverse interconnected networks.
Show icon in notification area when connected
Close
Cancel
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 192 . 168 . 1 . 100
Subnet mask: 255 . 255 . 255 . 0
Default gateway: 192 . 168 . 1 . 254
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server: 192 . 168 . 1 . 2
Alternate DNS server: 168 . 95 . 192 . 1
Advanced...
OK
Cancel

x. A quick way to access remote monitoring is to left-click the mouse twice on a selected IP Camera listed on “Device list” of IP Installer. An IE browser will be opened.

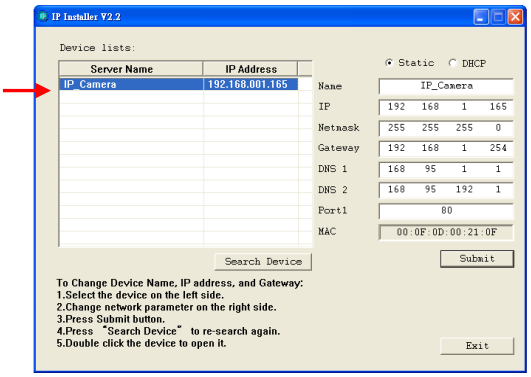

xi. Then, please key in the default “user name: admin” and “password: admin”.

D. Install ActiveX control:

For the first time to view the camera video via IE, it will ask you to install the ActiveX component.

IP CAMERA - Microsoft Internet Explorer
File Edit View Favorites Tools Help
Back
Search
Favorites
Address
http://192.168.1.217/
This site might require the following ActiveX control: 'Hunt Verisign Control' from 'Hunt Electronic Co.,Ltd'. Click here to install...

If the installation failed, please check the security setting for the IE browser.

i. IE → Tools → Internet Options… → Security Tab → Custom Level… → Security Settings → Download unsigned ActiveX controls→ Select “Enable” or Prompt.

ii. IE → Tools → Internet Options… → Security Tab → Custom Level… →Initialize and script ActiveX controls not marked as safe → Select “Enable” or Prompt.

1

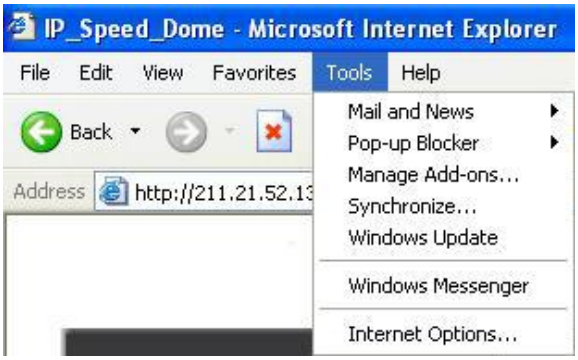

2

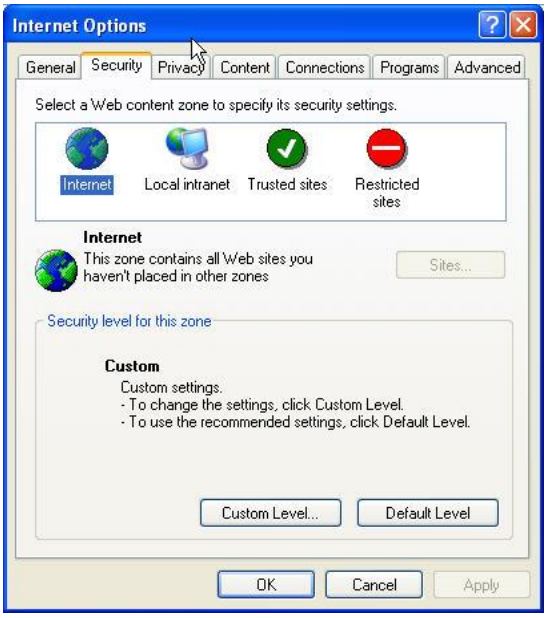

3

4

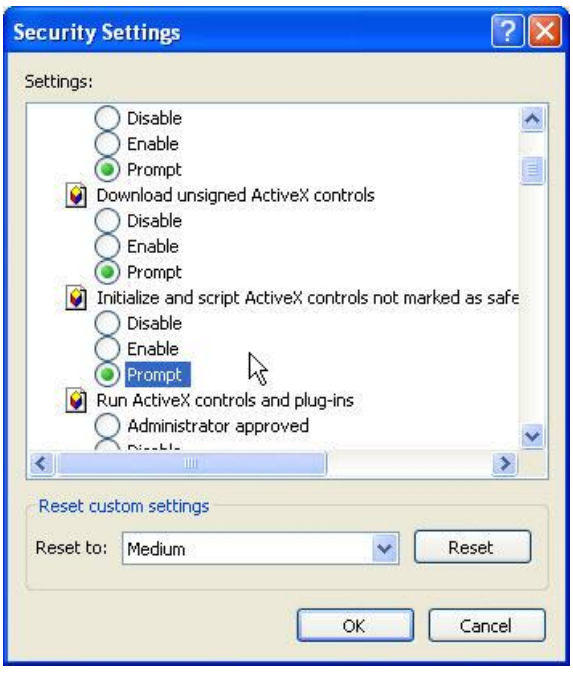

5

When popup the following dialogue box, click “Yes”.

IV. Live Video

Start a IE browser, type the IP address of the IP camera in the address field. It will show the following dialogue box. Key-in the user name and password. The default user name and password are “**admin**” and “**admin**”.

When connect to the IP CAMERA。The following program interface shows.

1. ：Get into the administration page
2. ：Video Snapshot
3. Show system time, video resolution, and video refreshing rate
4. Select video streaming source **(When streaming 2 setting in『Video Setting』 is closed, this function will not display)**
5. IP Camera supports 2-way audio. Click the “Chatting” check box. Then you can use microphone which connects to the PC to talk to server side, which is IP Camera side
6. Control the relay which is connected to this camera.

Double-click the video, it will change to full screen mode. Press “Esc” or double-click the video again, it will change back to normal mode.

Right-Click the mouse on the video, it will show a pop-up menu.

1. Snapshot：Save a JPEG picture
2. Record Start：Record the video in the local PC. It will ask you where to save the video. To stop recording, right-click the mouse again. Select “Record Stop”. The video format is AVI. Use Microsoft Media Player to play the recorded file.
3. Mute：Turn of the audio. Click again to turn on it.
4. Full Screen：Full-screen mode.
5. ZOOM: Enable zoom-in and zoom-out functions. Select “Enable digital zoom” option first within the pop-up dialogue box and then drag and drop the bar to adjust the zoom factors.

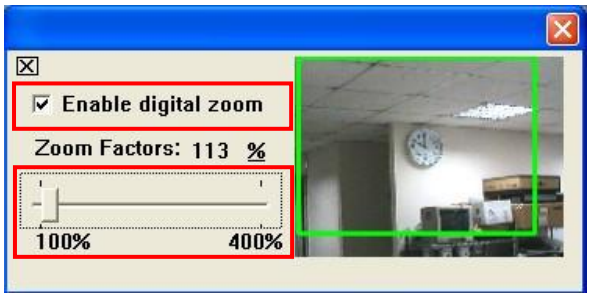

V. Configuration

Click to get into the administration page. Click to go back to the live video page.

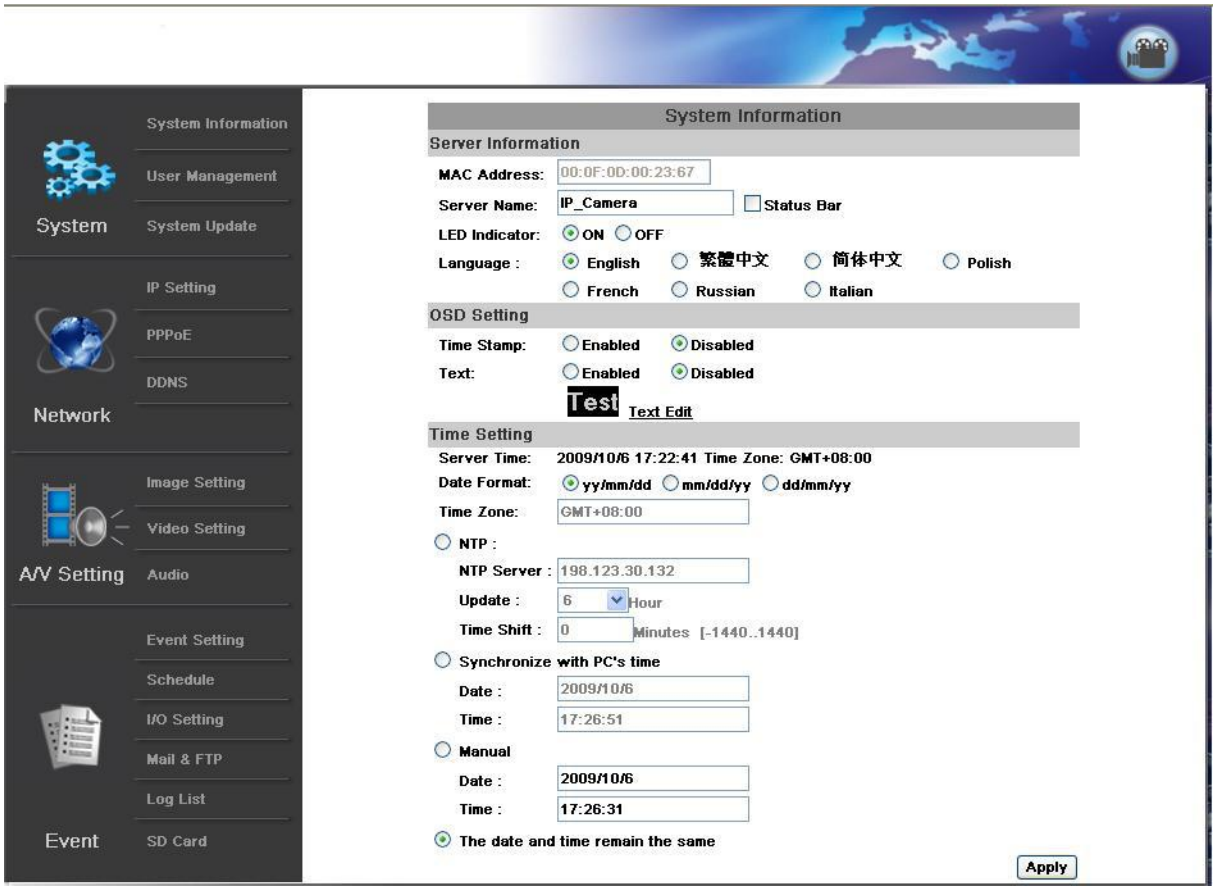

A.System

i、 System Information

a. Server Information: Set up the camera name, select language, and set up the camera time.

1. Server Name：This is the Camera name. This name will show on the IP Installer.
2. Select language：There are English, Traditional Chinese, and Simplified Chinese to select. When change, it will show the following dialogue box for the confirmation of changing language.

b. OSD Setting: Select a position where date & time stamp / text showing on screen.

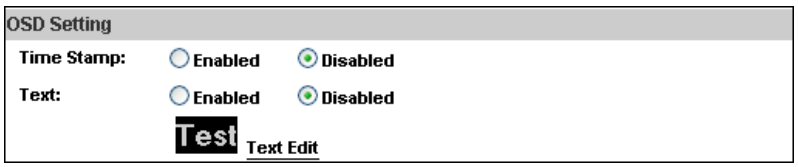

Moreover, click Text Edit can entry to adjust the OSD contents which is including Size and Alpha of text. Finally, click Upgrade button to reserve the setting.

c. Server time setting：Select options to set up time - “NTP”, “Synchronize with PC’s time”, “Manual”, “The date and time remain the same”.

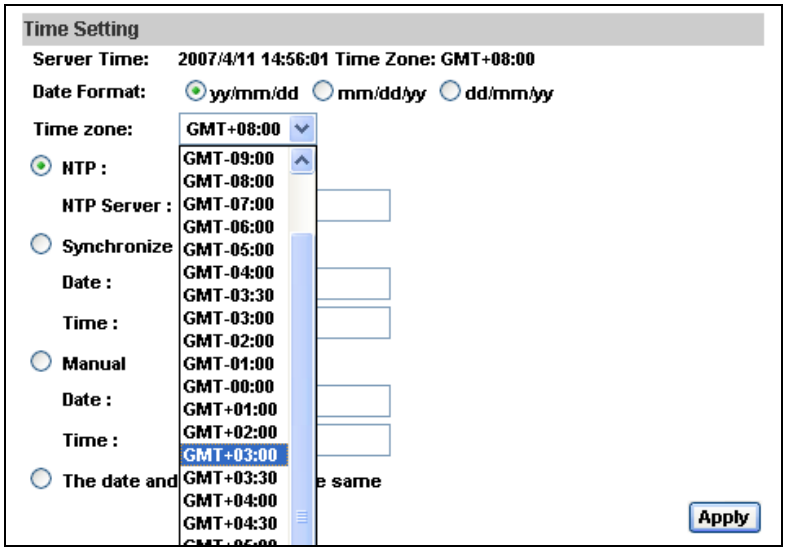

ii、 User Management

IP CAMERA supports three different users, administrator, general user, and anonymous user.

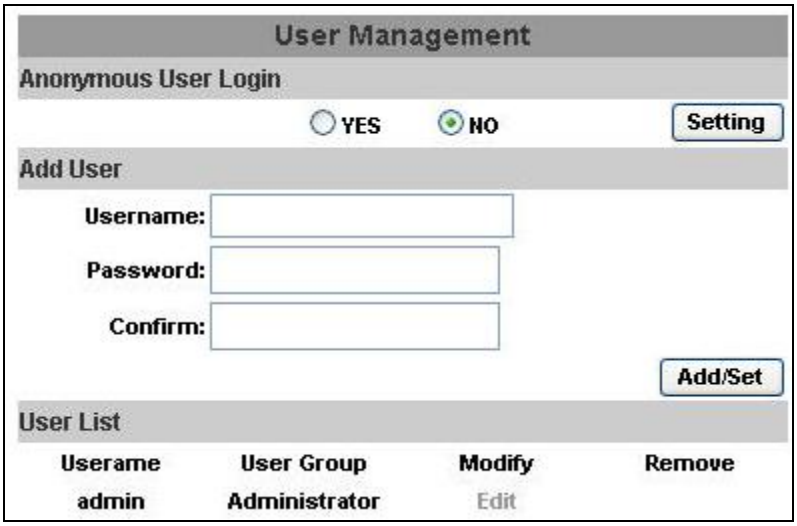

a. Anonymous User Login：

Yes：Allow anonymous login

No：Need user name & password to access this IP camera

b. Add user：

Type the user name and password, then click “Add/Set”.

c. Click “edit” or “delete” to modify the user.

User_Setting - Microsoft Internet Explorer
User Setup
Username:
admin
Password:
Confirm:
OK

iii、 System update：

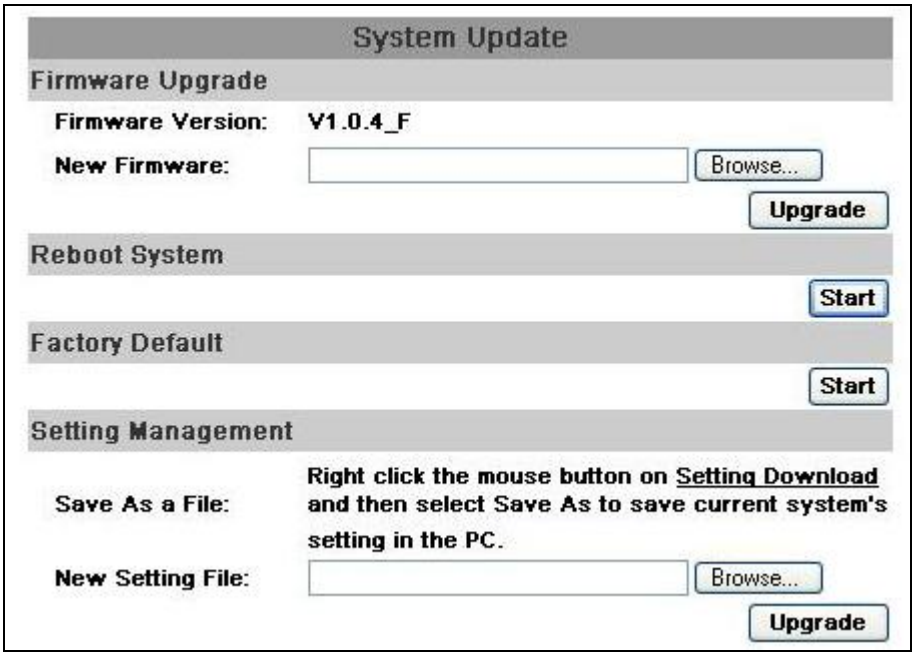

a. To update the firmware online, click “Browse…” to select the firmware. Then click “Upgrade” to proceed.

b. Reboot system：re-start the IP camera

c. Factory default：delete all the settings in this IP camera.

d. Setting Management：User may download the current setting to PC, or upgrade from previous saved setting.

   1. Setting download:
      Right-click the mouse button on Setting Download → Select “Save AS…” to save current IP CAM setting in PC → Select saving directory → Save
   2. Upgrade from previous setting
      Browse → search previous setting → open → upgrade → Setting update confirm → click **index.html**. to return to main page

B.Network

i、 IP Setting

IP Camera supports DHCP and static IP.

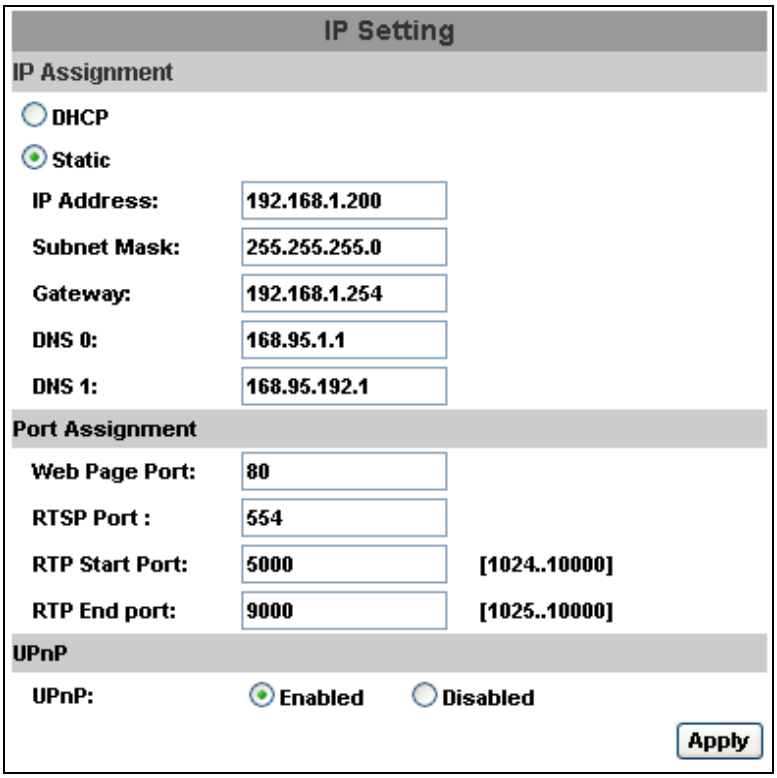

a. DHCP：Using DHCP, IP Camera will get all the network parameters automatically.

b. Static IP：Please type in IP address, subnet mask, gateway, and DNS manually.

c. Port Assignment: user may need to assign different port to avoid conflict when setting up IP assignment.

   1. Web Page Port: setup web page connecting port and video transmitting port (Default: 80)
   2. RTSP Port: setup port for RTSP transmitting (Default: 554)
   3. RTP Start and End Port: in RTSP mode, you may use TCP and UDP for connecting. TCP connection uses RTSP Port (554). UDP connection uses RTP Start and End Port.

d. UPnP

This IP camera supports UPnP, If this service is enabled on your computer, the camera will automatically be detected and a new icon will be added to “My Network Places.”

Note: UPnP must be enabled on your computer.

Please follow the procedure to activate UPnP

1. open the Control Panel from the Start Menu
2. select Add/Remove Programs
3. Select Add/Remove Windows Components and open Networking Services section
4. Click Details and select UPnP to setup the service
5. The IP device icon will be added to “MY Network Places”
6. User may double click the IP device icon to access IE browser

ii、 PPPoE：

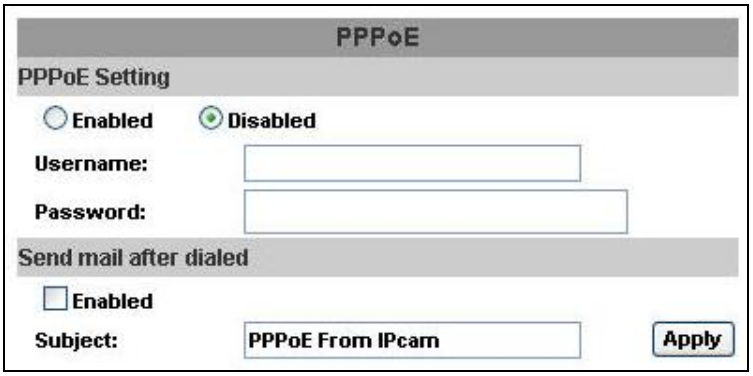

Select “Enabled” to use PPPoE.

Key-in Username and password for the ADSL connection.

Send mail after dialed：When connect to the internet, it will send a mail to a specific mail account. For the mail setting, please refer to “Mail and FTP” settings.

iii、 DDNS：

It supports DDNS (Dynamic DNS) service.

a. DynDNS：

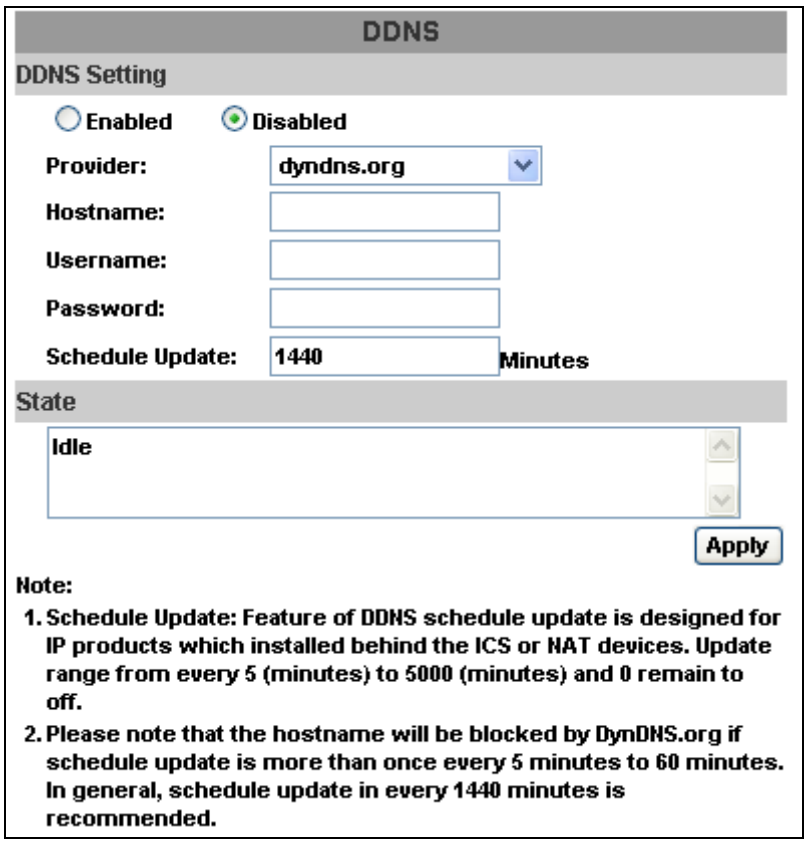
DDNS
DDNS Setting
Enabled
Disabled
Provider:
dyndns.org
Hostname:
Username:
Password:
Schedule Update:
1440
Minutes
State
Idle
Apply
Note:
1. Schedule Update: Feature of DDNS schedule update is designed for IP products which installed behind the ICS or NAT devices. Update range from every 5 (minutes) to 5000 (minutes) and 0 remain to off.
2. Please note that the hostname will be blocked by DynDNS.org if schedule update is more than once every 5 minutes to 60 minutes. In general, schedule update in every 1440 minutes is recommended.

1. Enable this service
2. Key-in the DynDNS server name, user name, and password.
3. Set up the IP Schedule update refreshing rate.
4. Click “Apply”
5. If setting up IP schedule update too frequently, the IP may be blocked. In general, schedule update every day (1440 minutes) is recommended.

b. Camddns service：

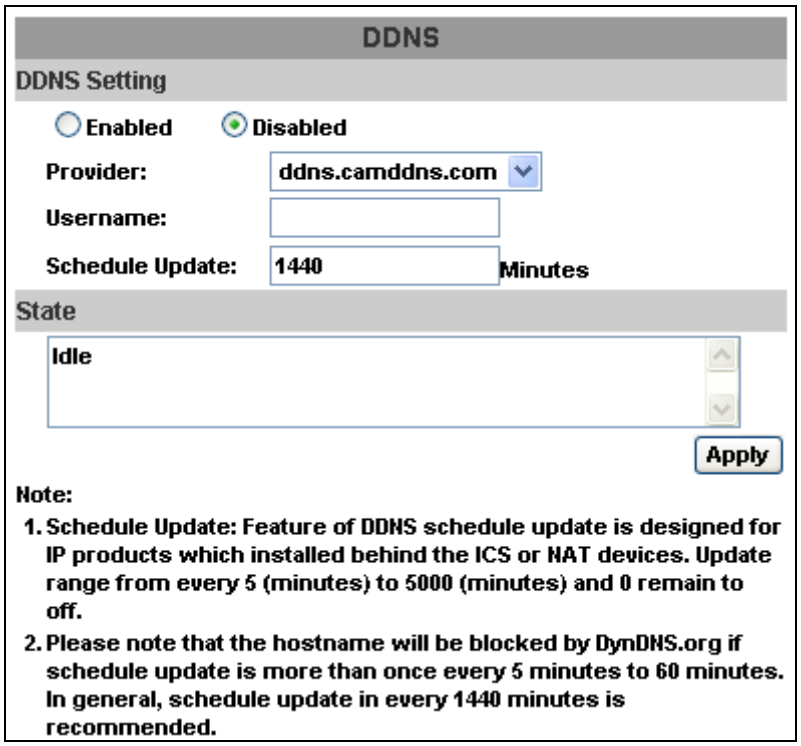
DDNS
DDNS Setting
Enabled
Disabled
Provider:
ddns.camddns.com
Username:
Schedule Update:
1440
Minutes
State
Idle
Apply
Note:
1. Schedule Update: Feature of DDNS schedule update is designed for IP products which installed behind the ICS or NAT devices. Update range from every 5 (minutes) to 5000 (minutes) and 0 remain to off.
2. Please note that the hostname will be blocked by DynDNS.org if schedule update is more than once every 5 minutes to 60 minutes. In general, schedule update in every 1440 minutes is recommended.

1. Please enable this service
2. Key-in user name.
3. IP Schedule update is default at 5 minutes
4. Click “Apply”.

c. DDNS Status

1. Updating：Information update
2. Idle：Stop service
3. DDNS registration successful, can now log by http://<username>.ddns.camddns.com：Register successfully.
4. Update Failed, the name is already registered：The user name has already been used. Please change it.
5. Update Failed, please check your internet connection：Network connection failed.
6. Update Failed, please check the account information you provide：The server, user name, and password may be wrong.

C. A/V Setting

i、 Image Setting

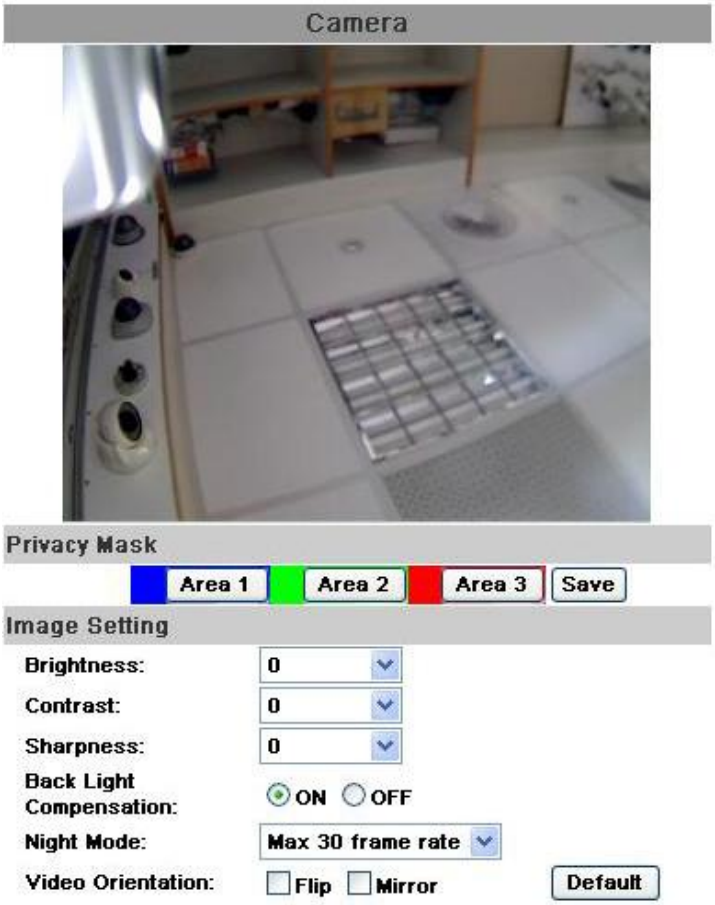

For the security purpose, there are three areas can be setup for privacy mask. Click Area button first and pull a area on the above image. Finally, click Save button to reserve the setting.

Adjust “Brightness”, “Contrast”, “Hue”, “Saturation” to get clear video.

Adjust “Brightness”, “Contrast”, “Hue”, “Saturation” to get clear video. Moreover, IP CAMERA supports “Back Light Compensation”, “Night Mode” and “Video Orientation”.

ii、 Video Setting

User may select 2 streaming output simultaneously:

Streaming 1 Setting: Basic mode and Advanced mode

Streaming 2 Setting: Basic mode, Advanced mode, and 3GPP mode

(Max Video Frame Rate for both streaming combined is 30 FPS)

a. Video System: click the drop down list to select the system type

b. Streaming 1 Basic Mode：

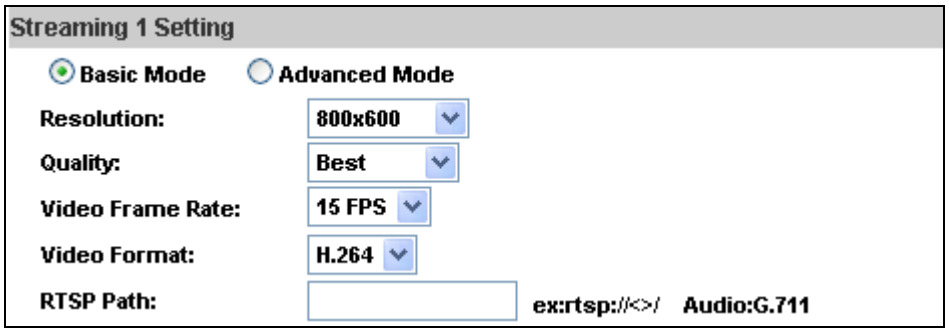

1. Resolution：
   There are 8 resolutions can be chosen.
   1600x 1200, 1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 176x144
2. Quality：
   There are 5 levels to adjust:
   Best/ High/ Standard/ Medium/ Low
   The higher the quality is, the bigger the file size is. Also not good for internet transmitting
3. Video Frame Rate：The video refreshing rate per second.
4. Video Format：H.264 or JPEG
5. RTSP Path: RTSP output name

c. Streaming 1 Advanced Mode：

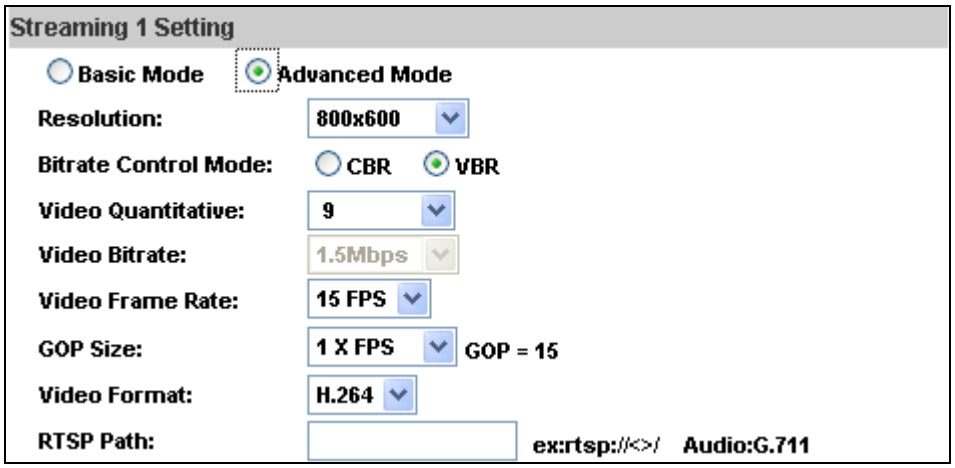

1. Resolution：
   There are 8 resolutions can be chosen.
   1600x 1200, 1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 176x144
2. Bitrate Control Mode
   There are CBR〔Constant Bit Rate〕 and VBR〔Variable Bit Rate〕to use.
   CBR：32Kbps~4Mbps (the higher the CBR is, the better the video quality is)
   VBR：1(Low)~10(High) – Compression rate, the higher the compression rate, the lower the picture quality is; vise versa. The balance between VBR and network bandwidth will affect picture quality. Please carefully select the VBR rate to avoid picture breaking up or lagging.
3. Video Frame Rate
   The video refreshing rate per second.
   NTSC: Max 30 frames/second PAL: Max 25 frames/second
4. GOP Size
   It means "Group of Pictures". The higher the GOP is, the better the quality is.
5. Video Format：H.264 or JPEG
6. RTSP Path: RTSP output connecting route

d. Streaming 2 Basic Mode：

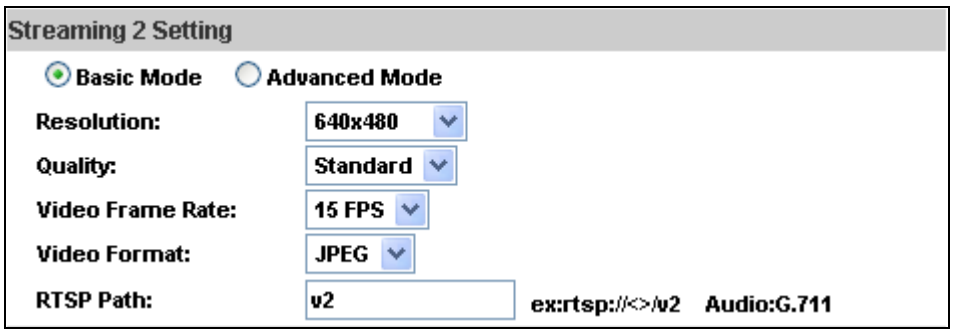

1. Resolution：

   There are 8 resolutions can be chosen.

   1600x 1200, 1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 176x144

2. Quality：

   There are 5 levels to adjust:

   Best/ High/ Standard/ Medium/ Low

   The higher the quality is, the bigger the file size is. Also not good for internet transmitting

3. Video Frame Rate：The video refreshing rate per second.
4. Video Format：H.264 or JPEG
5. RTSP Path: RTSP output connecting route

e. Streaming 2 Advanced Mode：

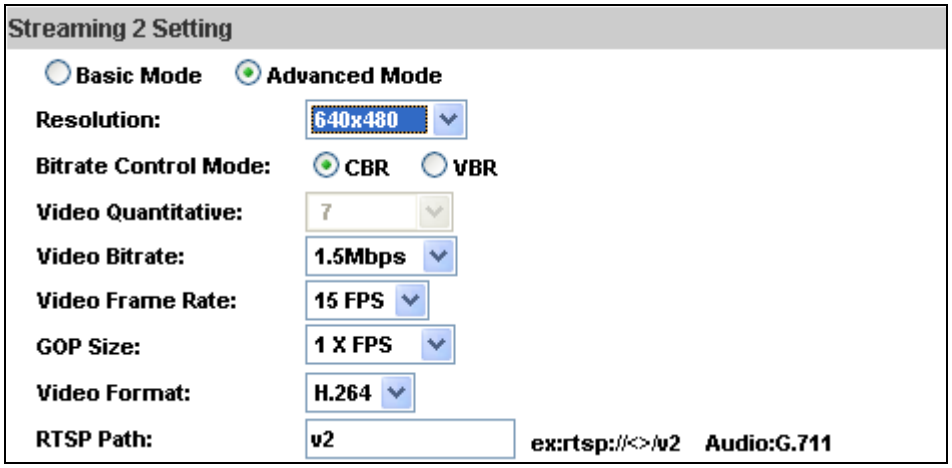

1. Resolution：

   There are 8 resolutions can be chosen.

   1600x 1200, 1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 176x144

2. Bitrate Control Mode

   There are CBR〔Constant Bit Rate〕 and VBR〔Variable Bit Rate〕to use.

   CBR：32Kbps~4Mbps (the higher the CBR is, the better the

video quality is)
VBR：1~10 (Compression Rate)

3. Video Frame Rate
   The video refreshing rate per second.
4. GOP Size
   It means "Group of Pictures". The higher the GOP is, the better the quality is.
5. Video Format：MPEG4 or JPEG
6. RTSP Path: RTSP output name

f. 3GPP Streaming mode:

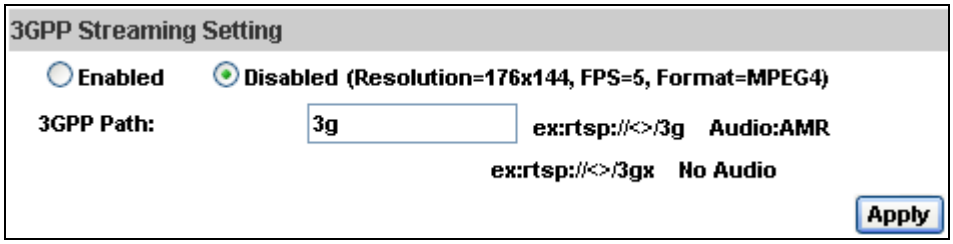

3GPP mode suggested setting: 176x144 resolution, 5FPS, MPEG4 format

1. Enable or Disable 3GPP Streaming
2. 3GPP: 3GPP output name

iii、 Audio：

IP CAMERA supports 2-way audio. User can send audio from IP Camera Built-in mic to remote PC; User can also send audio from remote PC to IP Camera's external speaker.

a. Audio from IP camera built-in mic to local PC: select "Enable" to start this function.

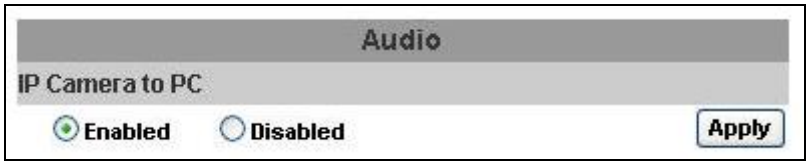

b. Audio from local PC to IP Camera: Check "chatting" in the browsing page

The Audio will not be smooth when enable SD card recording function simultaneously.

D.Event List

IP CAMERA provides multiple event settings.

i、 Event Setting

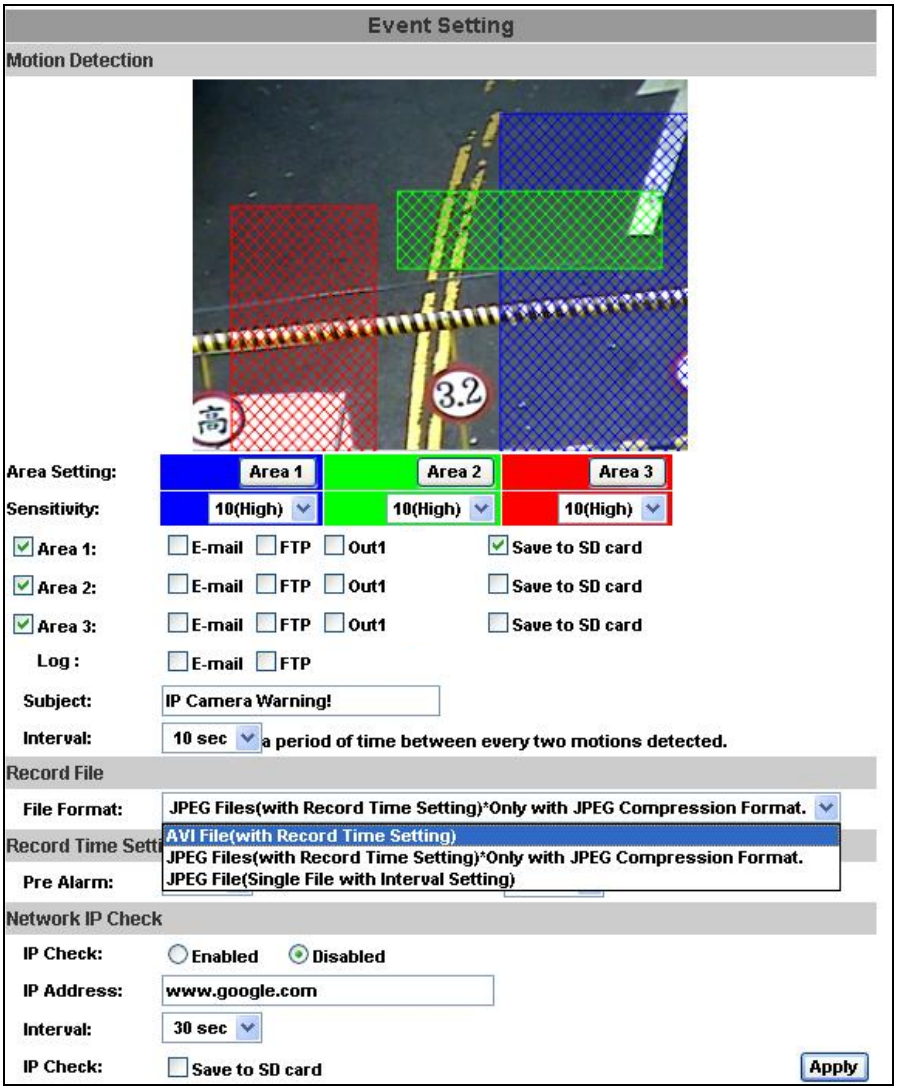

a. Motion Detection：

IP CAMERA allows 3 areas motion detection. When motion is triggered, it can send the video to some specific mail addresses, transmit the video to remote ftp server, trigger the relay, and save video to local SD card. To set up the motion area, click “Area Setting”. Using mouse to drag and draw the area. The same operation for area 2 and 3.

b. Record File Setting: IP CAMERA allows 3 different types of recording file to change its record size.

When motion/alarm is triggered, there are 3 different types of

record mode.

1. AVI File (With Record File Setting)
2. Multi-JPEG (With Record File Setting), only with JPEG compression format.
3. Single JPEG (Single File with Interval Setting)

c. Record Time Setting：

Pre Alarm and Post Alarm setups for video start and end time when motion detected, I/O, or other devices got triggered.

Note: Pre/Post Alarm record time is base on record time setting and IP Cam built-in Ram memory. Limited by IP Cam built-in Ram Memory, When information is too much or video quality set too high, it will cause recording frame drop or decrease on post alarm recording time.

d. Network Dis-connected：

When the network is down, it will save the video to local SD card. This function is only enabled in wire connection.

e. Network IP check

When the connection is down, it records the video to SD card. Make sure the video recording is continuous. To use this function, key in the IP address of the PC which has recording software installed. Enable the function of “Save to SD card”, then click “Apply”.

The interval of two video files on SD card is fixed with 30 seconds.

ii、 Schedule

a. Schedule: After complete the schedule setup, the camera data will be recorded according to the schedule setup.

b. Snapshot: After enable the snapshot function, user can select the storage position of snapshot file, the interval time of snapshot and the reserved file name of snapshot.

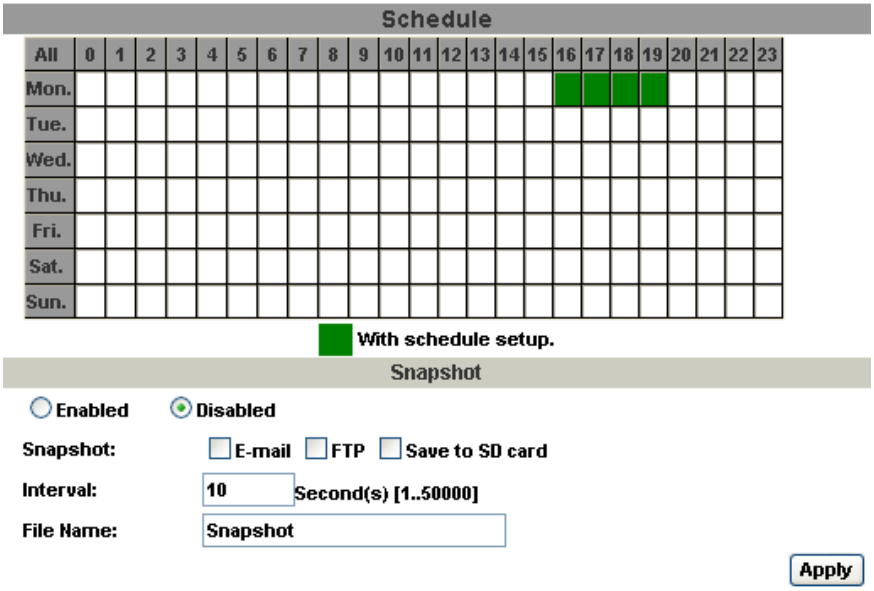

iii、 I/O Setting

IP CAMERA supports 1 input/ 1 output. When input is triggered, it can send the video to some specific mail addresses, transmit the video to remote ftp server, trigger the relay, and save video to local SD card.

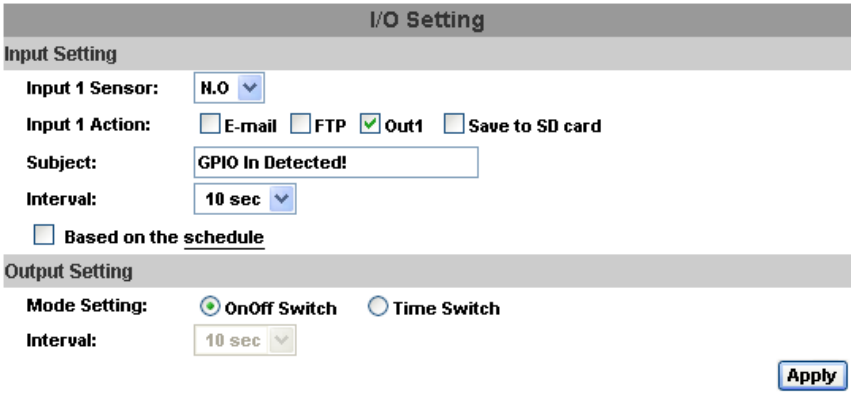

CATUTION!!

Please connect to propriety relay box to reduce the risk of electric shock & damaged.

Alarm Input Setting

By GPIO I/O port input that provide related action while I/O input triggered.

GPIO Output Setting

By GPIO I/O port output that provide OnOff Switch, Slide Switch & Pan/Tilt Module for using with relay box.

GPIO pin define please refer to the part of Front / Back plane & I/O port pin assignment

GPIO 0	ALARM INPUT Normal: 3.3V (The voltage differential from GPIO pin & GND) Active: 0V (GPIO 0 & GPIO1 link to PIN2 GND)
GPIO 1	
GPIO 2	ALARM OUTPUT Normal: 3.3V (The voltage differential from GPIO pin & GND) Active: 0V (GPIO 0 & GPIO1 link to PIN2 GND)
GPIO 3	

GPIO INSTALLATION EXAMPLE 1

Trigger a normal off (Normal Open) alarm siren on when event/motion occur at COM:

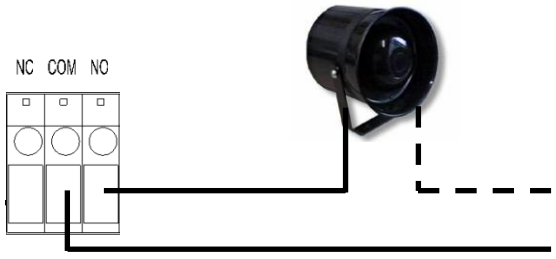

GPIO INSTALLATION EXAMPLE 2

Trigger the normal on (Normal Close) indoor illumination off when event / motion occur at COM:

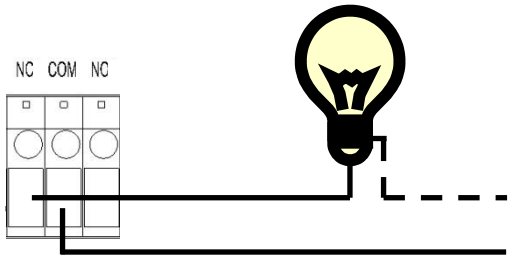

iv、 Mail & FTP

To send out the video via mail of ftp, please set up the configuration first.

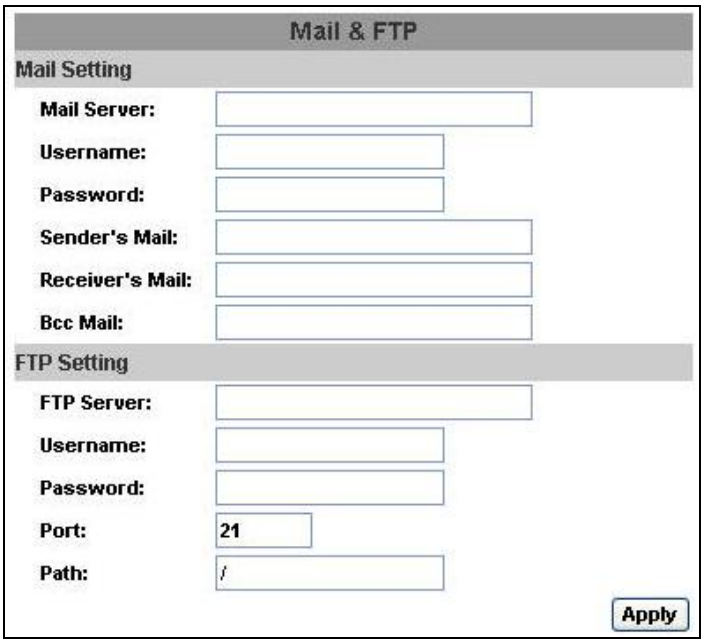

v、 Log List

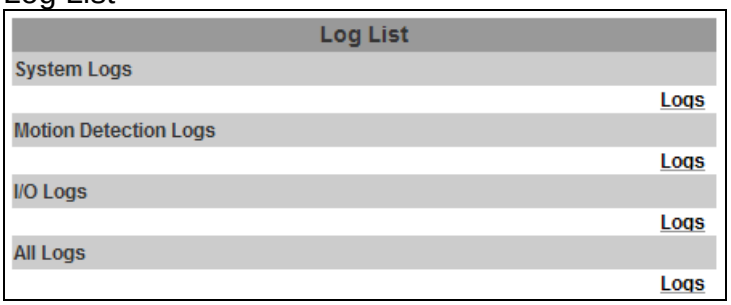

Sort by System Logs, Motion Detection Logs and I/O Logs. In addition, System Logs and I/O Logs won't lose data due to power failure.

vi、 SD card

Please Insert SD card before use it. Make sure pushing SD card into the slot completely.

Note：The use of the SD card will affect the operation of the IP CAMERA slightly, such as affecting the frame rate of the video.

a. Playback：

1. It will show the capacity of the SD card. Click the date listed on this page. It will show the list of the video.

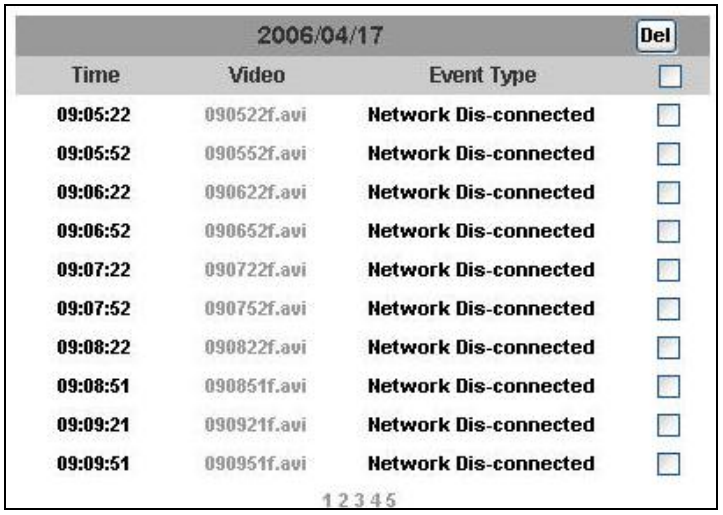

2. The video format is AVI. Click the video to start Microsoft Media Player to play it.
3. To delete the video, check it, then click Del. When the SD card is full, it will remove the oldest video automatically.

VI. Network Configuration

i、 Configuration 1：

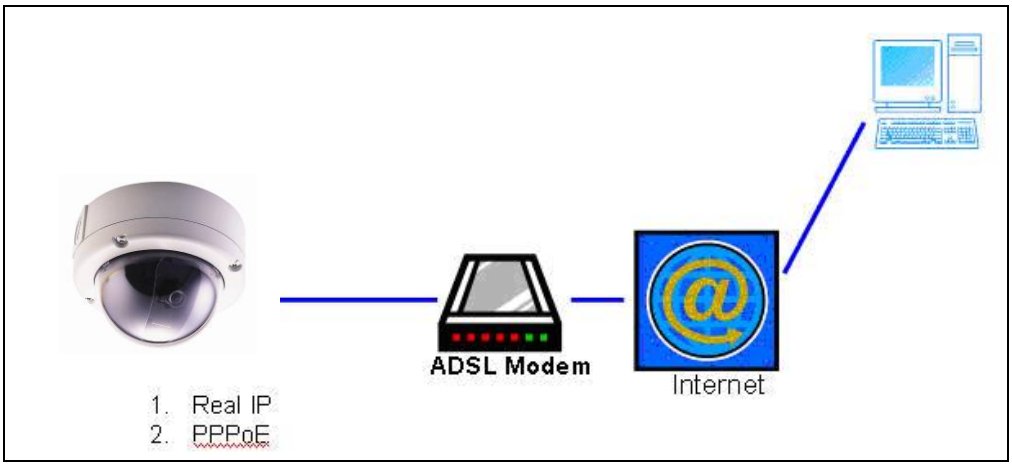

a. Internet Access：ADSL or Cable Modem
b. IP address：One real IP or one dynamic IP
c. Only IP CAMERA connects to the internet
d. For fixed real IP, set up the IP into IP CAMERA. For dynamic IP, start PPPoE.

ii、 Configuration 2：

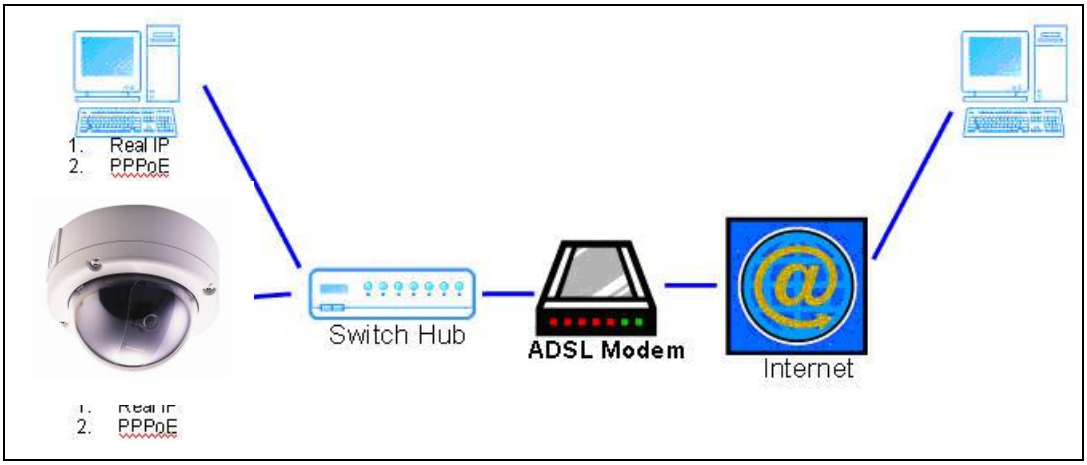

a. Internet Access：ADSL or Cable Modem
b. IP address：More than one real IP or one dynamic IP
c. IP CAMERA and PC connect to the internet
d. Device needed：Switch Hub
e. For fixed real IP, set up the IP into IP CAMERA and PC. For dynamic IP, start PPPoE.

iii、 Configuration 3：

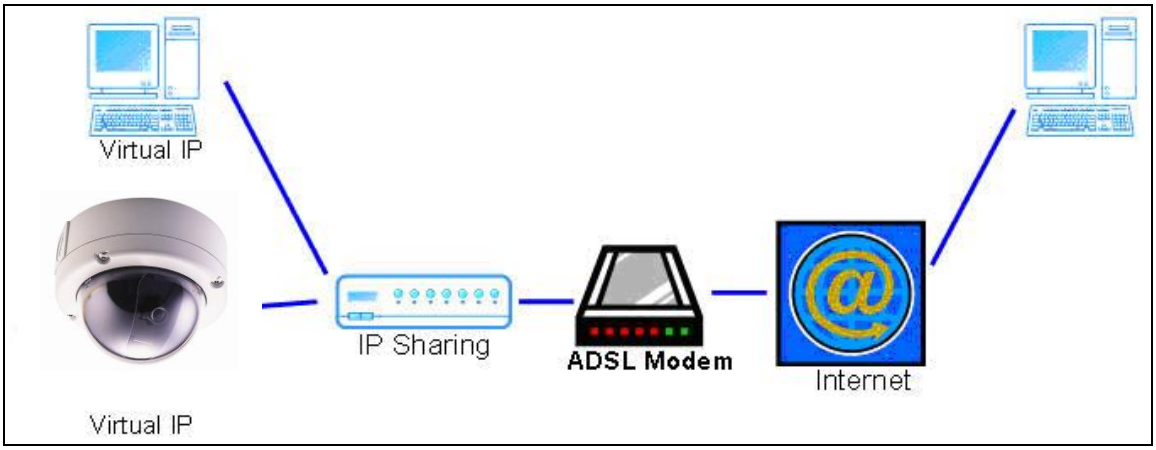

a. Internet Access：ADSL or Cable Modem
b. IP address：one real IP or one dynamic IP
c. IP CAMERA and PC connect to the internet
d. Device needed：IP sharing
e. Use virtual IP, set up port forwarding in IP sharing.

VII. Factory Default

i、 To recover the default IP address and password, please follow the following steps.

ii、 Remove power, and press and hold the button in the back of IP CAMERA.

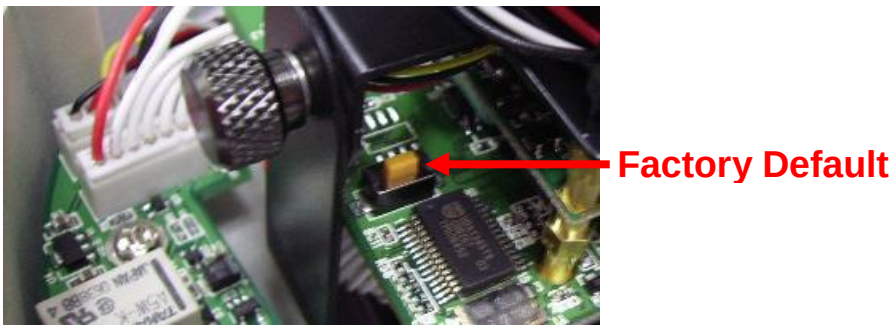

iii、 Power on the camera. Don't release the button during the system booting.

iv、 It will take around 30 seconds to boot the camera.

v、 Release the button when camera finishes proceed.

vi、 Re-login the camera using the default IP (http://192.168.1.200), and user name (admin), password (admin).

VIII. Package contents

i、 IP CAMERA Network Camera

ii、 Adaptor

iii、 Ethernet Cable

iv、 CD title (User manual, IP installation Utility)

Appendix I

SD Card Recommended：

SanDisk 128M	Tracend 128M 80X
SanDisk 256M	Tracend 256M 80X
SanDisk 512M	Tracend 512M 80X
SanDisk 1G	Tracend 1G 80X
SanDisk 2G	Tracend 2G 80X
SanDisk 4G	Tracend 4G 80X